


Multilateral entrance application increases the convenience of installation





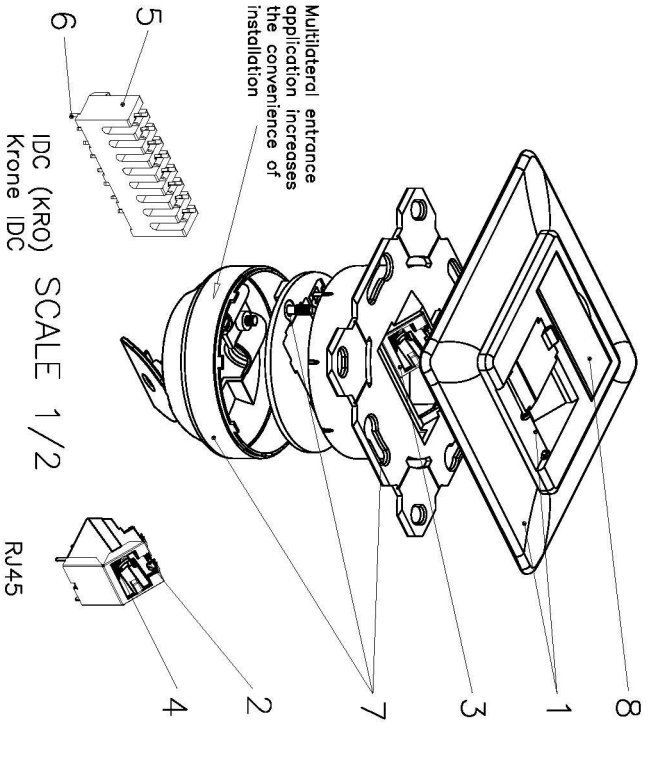


Specification :

- Material :
1. Flush Plate : ABS, UL 94-HB.
 2. RJ45 Jack Housing & Insert & Cover : PBT+15%, UL 94V-0.
 3. RJ45 Jack Shield : Bronze with Nickel plated.
 4. RJ45 Jack Contact material & finished :
 - 4-1. Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - 4-2. Contact area : Min. 3 mm 50 micro-inch Gold plated.
 5. IDC Housing : PC+5%, UL 94V-2.
 6. IDC Terminal material & finished :
 - 6-1. Phosphor Bronze with 50-60 micro-inch Tin plated.
 - 6-2. Krone tool only.
 7. Shield : Zinc Die-casting.
 8. Name plate : Polycarbonate.

Performance :

- The Sticker codes combine two wirings of T568A & T568B.
- Insertion Force : 900 grms for 8 contacts.
- Retention Strength : 7.7 kgs between Jack and Plug.
- Operation Temperature : -40°C to 80°C.
- Durability :
 - e-1. Jack : 750 cycles Plug-Jack mating and unmating test, insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.
 - e-2. IDC : Max. 200 punching times.
- The Cat.6 performance is in compliance with the ANSI/TIA/EIA 568 B.2-1 standard.

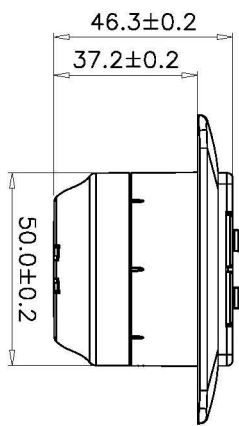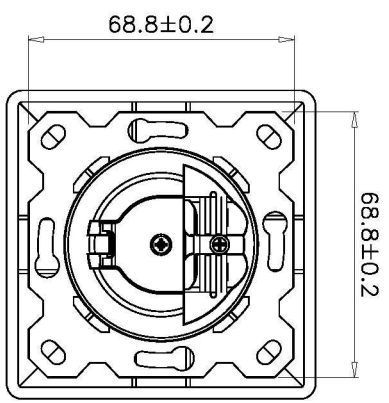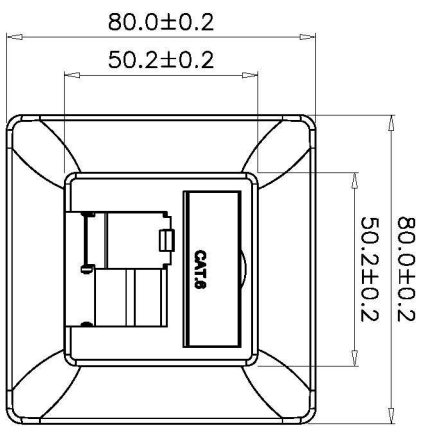

Remark : JE307DC6-FSSXX

(1) XX : Plastic Color
 WH=White(RAL9010), IV=Ivory(RAL1013).

GENERAL TOLERANCE OF DIMENSIONS		DRAWING		DATE		ITEM NO.:	
XXXX	±0.005	CHECK	28.SEP.2007	DATE		JE307DC6-FSSXX	
XXX	±0.05	APPROVAL	28.SEP.2007	DATE			
XX	±0.1						

SCALE	1/2 (A4)	UNIT	mm	DRAWING NO.	JE307DC6-FSSXX(SA1)	DES.:	1P C6 FS Multiple Cable Entrance Flush Plate
CHECK	28.SEP.2007						
APPROVAL	28.SEP.2007						

